


PACLINE™

OVERHEAD CONVEYORS

ISO 9001

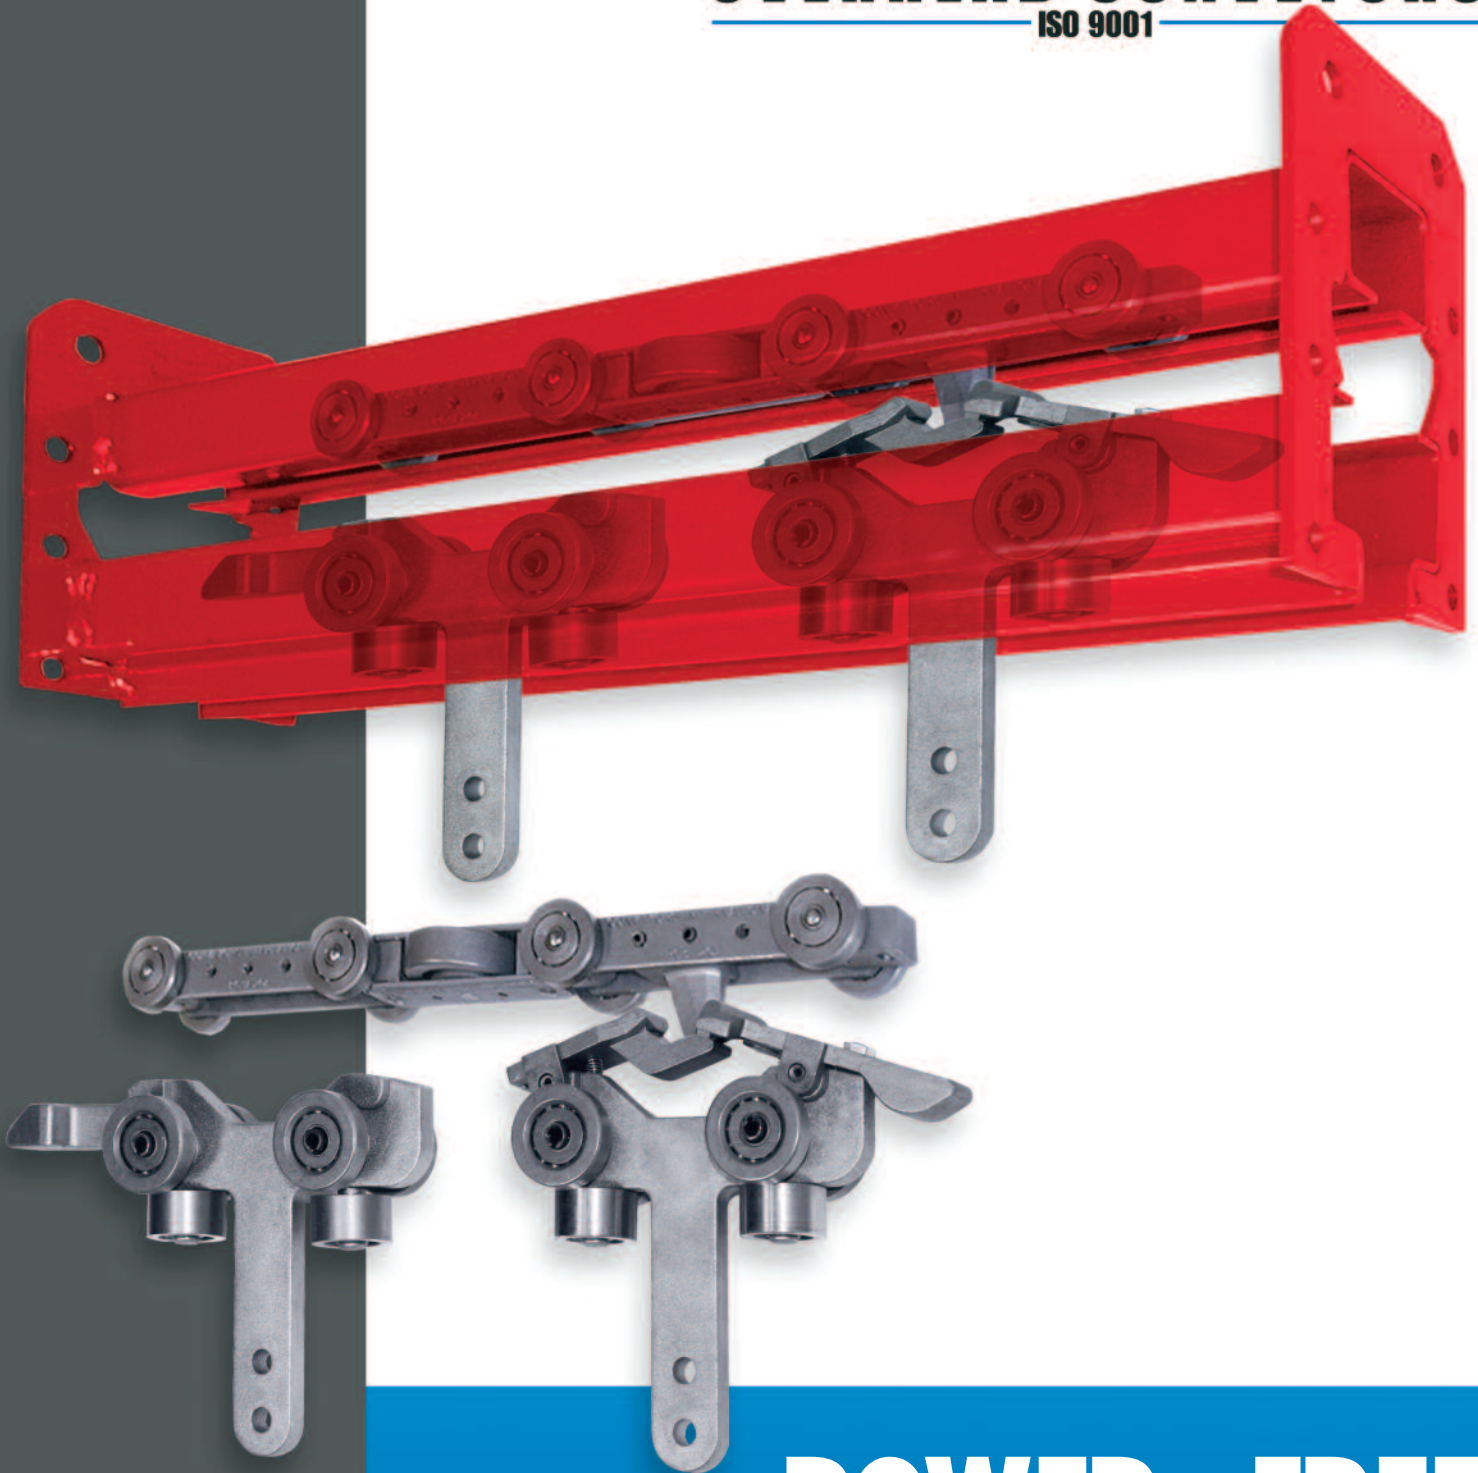



POWER & FREE™

MODEL S-310 & S-320 Conveyors





Compact Design • Tighter Curves • Precision Built
Modular Components • Bolted Assembly

POWER & FREE™

(Model S-310 & S-320) Specifications

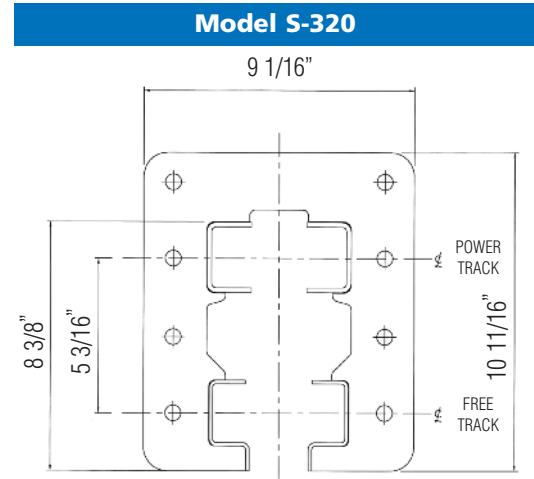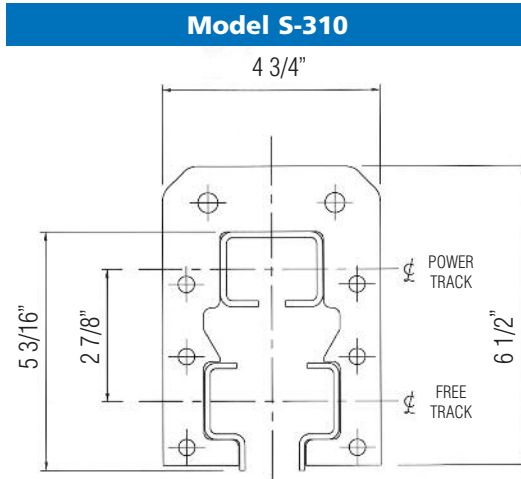

Maximum Capacity in lbs.



	S-310	S-320
Maximum Drive Pull	600 lbs.	2,000 lbs.
Chain Breaking Load	5,000 lbs.	15,000 lbs.
Max Chain Length Per Drive	1,000 ft.	1,000 ft.
Chain Friction Co-efficient	2.5%	2.5%
Pusher Dog Pitch	8 inches	16 inches
Minimum Horizontal Curve Radius	24 inches	40 inches
Minimum Vertical Curve Radius	24 inches	48 inches
Maximum Drive Speed	60 F.P.M.	33 F.P.M.
Maximum Incline Angle	90 degrees	45 degrees
Capable of Being Inverted	yes	yes



Distributed by:  **B & C**
INDUSTRIAL
PRODUCTS, INC.

1120 Fuller Drive
Garrett, Indiana 46738
PH: (888) 276-3386
FAX: (260) 357-0889
EMAIL: sales@bandcip.com

PACLINE™
OVERHEAD CONVEYORS
WWW.PACLINE.COM