

# WC 3600 SERIES



- Capacity to 230 lbs.
- Available with over half a dozen fastener options.
- Double ball raceway.
- Applications: Bakery racks, laundry carts, light duty stock carts, food service equipment, service carts (for hotels, resorts, hospitals, and restaurants), garment racks, Z trucks, etc.




WHEEL	FASTENER	WHEEL	WHEEL	FASTENER	FASTENER	FASTENER	REPLACE ** WITH FASTENER CODE	
							SWIVEL #	RIGID #
3	1	SOFT RUBBER	NYLON	110	2-13/16	3-3/4	WC3630-**-SR	WC3630R-**-SR
		HARD RUBBER	NYLON	130			WC3630-**-HR	WC3630R-**-HR
		POLYOLEFIN	PLAIN	175			WC3630-**-LDP	WC3630R-**-LDP
		POLY-U ON POLY-O (GRAY/BEIGE)	PLAIN	175			WC3630-**-PPPG	WC3630R-**-PPPG
		THERMAL PLASTIC RUBBER	PLAIN	175			WC3630-**-TRP	WC3630R-**-TRP
YOKE AXLE & NUT	-	230	WC3630-**-YAN	WC3630R-**-YAN				
4	1	SOFT RUBBER	NYLON	130	3-1/4	4-3/4	WC3640-**-SR	WC3640R-**-SR
		HARD RUBBER	NYLON	175			WC3640-**-HR	WC3640R-**-HR
		POLYOLEFIN	OILITE	220			WC3640-**-HDPO	WC3640R-**-HDPO
		POLY-U ON POLY-O (GRAY/BEIGE)	PLAIN	220			WC3640-**-PPPG	WC3640R-**-PPPG
		THERMAL PLASTIC RUBBER	PLAIN	190			WC3640-**-TRP	WC3640R-**-TRP
YOKE AXLE & NUT	-	230	WC3640-**-YAN	WC3640R-**-YAN				
5	1	SOFT RUBBER	NYLON	150	3-1/2	5-3/4	WC3650-**-SR	WC3650R-**-SR
		HARD RUBBER	NYLON	220			WC3650-**-HR	WC3650R-**-HR
		POLYOLEFIN	OILITE	230			WC3650-**-HDPO	WC3650R-**-HDPO
		POLY-U ON POLY-O (GRAY/BEIGE)	PLAIN	220			WC3650-**-PPPG	WC3650R-**-PPPG
		THERMAL PLASTIC RUBBER	PLAIN	200			WC3650-**-TRP	WC3650R-**-TRP
YOKE AXLE & NUT	-	230	WC3650-**-YAN	WC3650R-**-YAN				


FASTENERS FOR WC 3600 SERIES		
FASTENER TYPE	CODE	SIZE
TOP PLATE	01	OVERALL: 2-3/4 x 3-3/4 HOLE SPACING: 1-3/4 x 2-7/8 SLOTTED TO 3 ATTACHING BOLT SIZE: 5/16
GRIP RING STEM	11 12 14 17	A x B 7/16 x 1-1/2 .845 x 2-3/16 1.48 x 3 WITH TWO GRIP RINGS (TOP & BOTTOM) 7/16 x 2
THREADED STEM (WITH HEX RACEWAY)	21 22 23	A-B x C 1/2-13 x 1-1/2 7/16-14 x 2-1/4 1/2-13 x 1
PIPE THREAD (NPT)	24 26N 34PT	1/2-13 x 2-1/4 1/2-13 x 2-13/16 THREADED FOR 3/4" PIPE COUPLING x 3/4" LONG
EXPANDABLE ADAPTER STEMS	25 26 27 28 29	FOR 1-3/8 I.D. 1-1/2 O.D. TUBING FOR 1-1/2" I.D. 1-5/8 O.D. TUBING FOR 7/8" I.D. 1" O.D. TUBING FOR 1" I.D. 1-1/8" O.D. TUBING FOR 1-1/8" I.D. 1-1/4 O.D. TUBING
ROUND PLAIN STEM	31	7/8 x 1-7/16 WITH 5/16 CROSS DRILLED HOLE 29/32 UP
OCTAGON	42	7/8 x 2 WITH 5/16 CROSS DRILLED HOLE 1" UP
ROUND STEM FOR ADJUSTABLE LEG	61 62	1-1/4" DIAMETER x 4" LONG ROUND STEM WITH A 3/4" THREADED HOLE 3-3/4" DEEP. 1-1/4" DIAMETER x 2" LONG ROUND STEM WITH A 3/4" THREADED HOLE 1-1/4" DEEP.

# WC 3600 SERIES


## FASTENER DIAGRAMS




-01- TOP PLATE




-11-, -12-, -17-  
GRIP RING STEM




-14-  
GRIP RING STEM




THREADED STEM




34PT  
PIPE THREAD STEM



-26-




-29-




-25-, -27-, -28-

EXPANDABLE ADAPTER STEMS

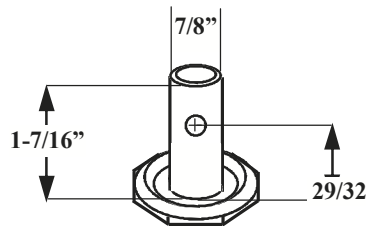

-31- ROUND STEM



-42- OCTAGON STEM

## OPTIONS FOR WC 3600 SERIES (Add option abbreviation to end of the caster part #)

TOP LOCK BRAKE



TLB

RIVETED AXLE  
(FACTORY ORDER)



RA

SPECIAL FINISHES  
(FACTORY ORDER)

POLISHED	PGF
GOLD FINISH	PGF
BLACK OXIDE	BO
NICKLE	N
CHROME	CR